

AL ANDALUS
INTERNATIONAL



AL ANDALUS INTL.
FOR BUILDING MATERIALS

) FIBER CEMENT & GYPSUM BOARDS



SH:RA
Fiber Cement Solutions

SHERA FIBER CEMENT PRODUCTS

FLOORING COLLECTION

Floor Plank.
Stair.
Flooring Board (15mm, 16mm, 18mm).

ROOFING FIBER CEMENT COLLECTION.

Eavs(smooth & Wooden texture).
Shake(uncoloured & Colored).
Strip(uncoloured & Colored).

DECORATIVE FIBER CEMENT PRODUCTS.

Vent Board.
Eaves Drop.
Eaves Lace.
Neo Series

SIDING & CEILING COLLECTION.

Planks(Plain & Wooden texture).
Splendid Plank(Plain & Wooden texture) .
Skirt & Laminated Skirt.
Fiber Cement Board (6mm, 9mm, 12mm).
Decorative Fiber Cement Board.

SHERA ACCESSORIES.

Screws.
Shera Aerylic Coating.
Shera Cement Jointing Compound.
Sealant PU25.
Fiber Mesh Tape.

) CEILING TILES & SUSPENSION SYSTEMS

GYPSUM TILES.

ACOUSTIC CEILING TILES.

ALUMINUM CEILING TILES (LAYIN, CLIPIN, PLAIN & PERFORATED).



) KIMMCO ROCKWOOL, FIBER GLASS & ACOUSTICAL INSULATION



Panels



Quilted blankets




Low density Blankets



Preformed pipes & elbows

) SMART ALUMINIUM SYSTEMS & ACCESSORIES

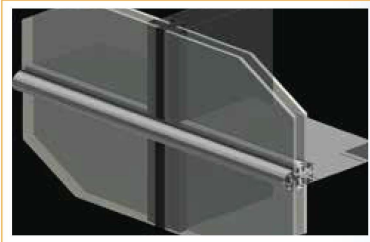

- | SMART THERMAL BREAK SYSTEMS SERIES.
- | CASEMENT/SLIDING SYSTEMS SERIES.
- | CURTAIN WALL SYSTEMS.
- | STRUCTURAL GLAZING SYSTEMS.




) FIRAT UPVC DOORS, WINDOWS & ACCESSORIES

FIRATPEN



> UPVC DOOR PANEL

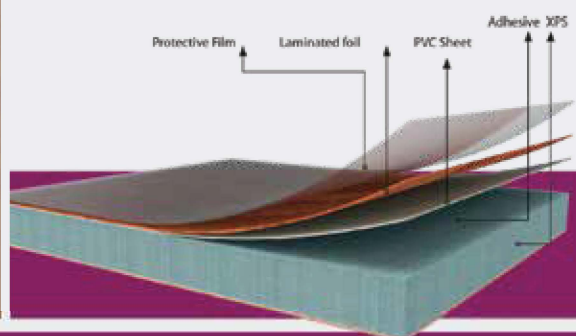


) HPL SHEETS





) ACRYLIC & POLYCARBONATE SHEETS

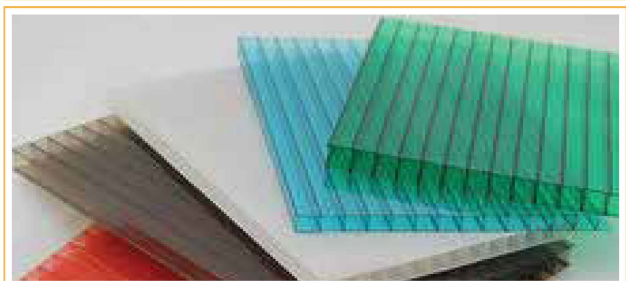

) GLASS SHEETS, MIRRORS & ACCESSORIES





PRIMERS



PRIMCLASSIC

ACRYLIC PRIMER FOR INDOOR FLOOR USES

- J** Secure the self-levelling compound adhesion.
- J** Ready to spread, without any dilution
- J** Odor free: can be used everywhere, even in occupied premises
- J** Non flammable
- J** Quick drying time

Jr:A



ENDUITPRENE NOFLAM

PRIMER FOR POROUS AND NON POROUS SURFACES

- J** Highly effective resin based primer for floors and walls indoor and floors outdoor
- J** Guarantees levelling compounds adhesion for all types of traffic areas, such as malls, hotels, airports and railway stations, etc.
- J** Odorless, can be used in all types of premises



SELF-LEVELING COMPOUNDS



ARDASOL3

SELF-LEVELLING COMPOUND FOR INDOOR USE IN ALL TYPES OF PREMISES

- J** Excellent surface finish without sanding
- J** Excellent adhesion on concrete substrates, cements and old tiles
- J** Use in premises with light & heavy traffic
- J** Compressive strength: 20 MPa (>28 days)



BREEAM



FLYT360

SELF-LEVELING COMPOUND FOR THICKNESS FROM 3 mm UP TO 60 mm

- J** Easy to prepare and ready-to-mix
- J** Good mechanical properties
- J** Suitable with all types of floorings
- J** Cracks free
- J** Compressive strength: 25 MPa (>28 days)



ADHESIVES



MIPLAFIX 100

SOLVENT FREE ACRYLIC ADHESIVE

- J** PVC Heterogeneous & Carpet floorings
- J** For residential premises, offices & areas with moderate traffic
- J** Solvent-free, odorless, low VOC class A+
- J** Waiting time: 10 to 15 minutes
- J** Open time: 40 to 45 minutes
- J** Walk-on time: Around 18 hours



MIPLAFIX 200

HIGH GRIP SOLVENT FREE ACRYLIC ADHESIVE -SPECIAL PROJECTS

- J** PVC Heterogeneous & Homogeneous, Carpet floorings, PVC on old PVC
- J** For premises with heavy traffic (hospitals, schools, shopping premises,)
- J** Bonding wall and floor coverings
- J** Suitable for WETROOM areas
- J** Waiting time: 5 to 10 minutes
- J** Open time: 40 to 55 minutes
- J** Walk-on time: Around 18 hours



MIPLAFIX 800

MULTI PURPOSE SOLVENT FREE ACRYLIC ADHESIVE

- J** PVC, Expanded vinyl, Semi-flexible tiles, LVT in planks or tiles, Linoleums, Carpets, rubber flooring
- J** PVC on non porous surface e.g. metal
- J** Waiting time: 10 to 15 minutes
- J** Open time: 60 minutes
- J** Walk-on time: Around 12 hours



SOL CONTACT NM

SPECIAL NEOPRENE GLUE

- J** Designed for heavy-duty areas
- J** Long working time
- J** Suitable on vertical surfaces (e.g. stair risers & skirtings)
- J** Waiting time: 5 to 15 minutes
- J** Open time: 45 to 60 minutes
- J** Walk-on time: Immediately



VINYL FLOORINGS

FLOORING COLLECTION



- | VINYL ROLLS
- | VINYL GLUE
- | VINYL TILES
- | VINYL ACCESSORIES
- | VINYL SKERTING

Ge1rflof
the ft.00 nng mup



Den Braven

Silicon, Sealants, Adhesives & PU Foams

HIGH TACK

High quality adhesive with extreme high grab properties

- Extreme high initial grip
- Adhere heavy materials without fixation
- High strength
- High mechanical resistance
- Durable elastic
- Neutral curing
- Weather resistant
- Free of isocyanates, phthalates, solvents and silicones



SILICONE CONSTRUCT

Coloured neutral silicone for sanitary, glazing and facade joints

- Wide variety of standard colours
- Universal contractors silicone
- Neutral 100% silicone
- For facade, glazing and sanitary
- Very good adhesion
- Almost odourless



SILICONE-1001 U

Universal Acetoxy Silicone

- Versatile sealant
- High elasticity
- Good resistance to UV, water and weather
- Excellent adhesion to glass and most metals
- Fast curing
- Mildew resistant



HYBRISEAL® FAÇADE

Versatile one component sealant for facade joints

- Special formulation for facade joints
- Certified also for pedestrian walkways according to EN 15651-4
- Bubble free
- No shrinkage
- Free of isocyanates and silicones
- Low modulus and highly elastic
- Good resistant to UV, water and weather



ACRYL-1001U

High quality water based acrylic sealant

- Paintable with water based and synthetic paints
- Perfect adhesion without use of a primer on most, even slightly damp substrates
- Versatile economic acrylic sealant
- Almost odourless
- Easy to apply and clean
- Non corrosive towards metals



PU FOAM

Two component mounting and insulating polyurethane foam with a high dimensional stability

- Quick curing time
- Fast tack free and cutting time
- Excellent adhesion to concrete, masonry, wood and many plastics
- Excellent properties for heat resistance and noise reduction
- Filling cavities with insufficient moisture access





Zwaluw FireProtect® FP Acrylic Sealant

Benefits

- Tested according to EN 1366-4
- Up to 4 hours fire resistance
- Can be applied separately in joints up to 20 mm wide
- Can be combined with FP PU Foam up to 30 mm wide
- Paintable with most water based and synthetic paints
- Easy to apply and clean
- Joint movement up to 7.5%
- Also available in grey
- Nearly non smelling
- Non corrosive towards metals



Zwaluw FireProtect® FP Silicone Sealant

Benefits

- Tested according to EN 1366-4
- Up to 4 hours of fire resistance
- Can be applied in joints up to 30 mm wide
- In combination with Zwaluw FP PU Foam in joints up to 40 mm wide
- Excellent processing, does not slump
- Joint movement up to 25%
- Good resistance to UV, water and weather
- Resists fungus and vermin
- Airtight sealing
- Outside applicable



Zwaluw FireProtect® FP Hybrid Sealant

Benefits

- Tested according to EN 1366-4
- Up to 4 hours of fire resistance
- Also suitable for wall/ceiling and wall/floor connections
- Suitable for joints up to 30 mm wide
- Certified for steel/wooden frames
- Certified for all metal-stud connections
- Excellent processing and easy toolability
- Joint movement up to 25%
- Paintable with most water based and synthetic paints
- Non corrosive towards metals
- Good resistance to UV, water and weather



Zwaluw FireProtect® FP PU Foam

Benefits

- Tested according to EN 1366-4
- Applicable in joints from 5mm to 30 mm wide
- Combined with FP Silicone Sealant applicable in joints from 5mm to 40mm wide
- Separately applied, fire resistance up to 2 hours, combined with other FP products up to 4 hours
- Fire behaviour B1
- Easy to apply by gun
- Fast processing
- Tack free after 8 to 12 minutes

MACHINERIES

ALUMINUM & UPVC



Aluminum Corner Crimper



Aluminum Punch



Automatic Portable Template Copy Router Alum & PVC



End Milling Machine Portable for Alum




Mitre Saw 350 Or 400 Plate Size For Alum & PVC



Precision Double Mitre Saw Automatic Barcode System For Alum & PVC

STEEL



MS & GI ANGLES

MS & GI CHANNELS

MS & GI TUBES

THREADED RODS

MS & GI PIPES

MS & GI RAILING

WIRE MESH

BINDING WIRES

STEEL STRUCTURE

ALUMINIUM CHECKER PLATES

MS & GI SHEETS AND COILS

PPGI CORR SHEETS & COILS



Aluminum Window Friction Hinges



Concealed Hinges



Construction Door Accessory



Door Handle



Glass to Glass Hinge




Kitchen Cabinet Hinges



Aluminum Pivot Hinges



Handles

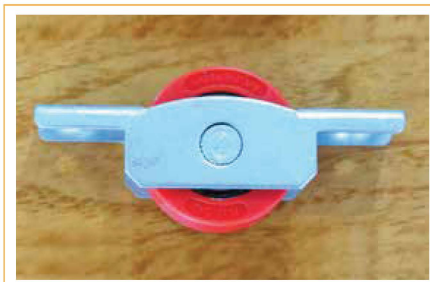

Sl-lrERA'M

build better, live better

FIRATPEN



Shamal Plastics
Industries LLC



Den Braven



KIIMMCO

maans insulation!



USGBORAL

RÖTEX®


G:erflor.
theflooringgroup



SMART
mu:ro:ruRfLsumms



AL ANDALUS INTL.
FOR BUILDING MATERIALS

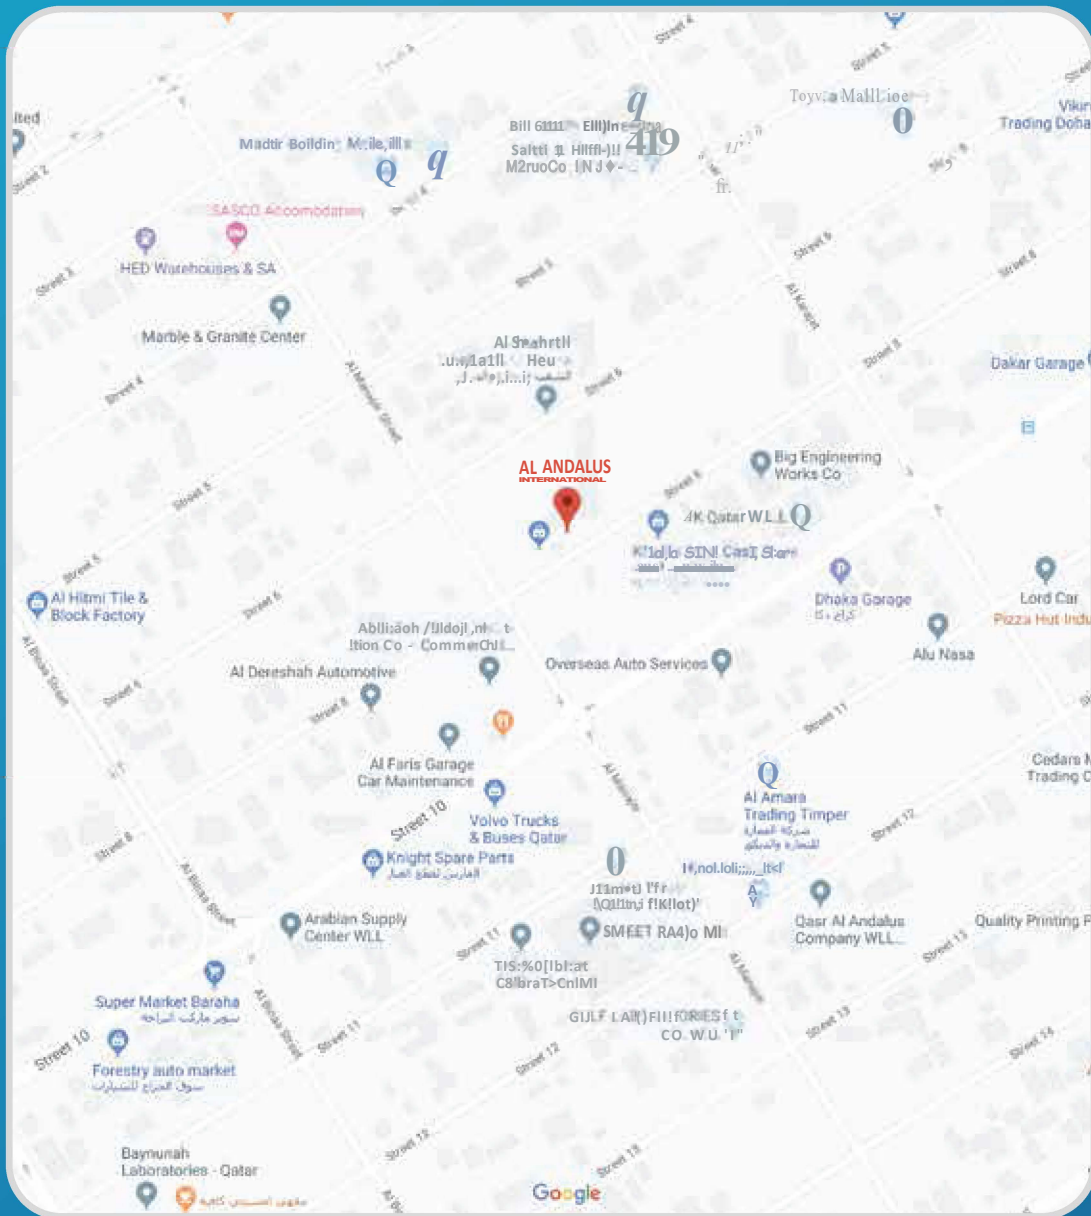

AL ANDALUS INTL.

FOR BUILDING MATERIALS

◆ Main Showroom

Industrial Area
St# 8 Gate# 90
Tel : 4460 1884
4460 0557
4460 2638
Fax : 4460 0065

◆ St# 27

Industrial Area
Tel : 4460 0310

◆ Sailiya

Gate# 4
Tel : 5000 2638

◆ Haraj

Tel : 4435 0384
Tel : 4435 5628

◆ Al Khor

Tel : 4477 0633
Fax: 4477 0663

P.O. Box: 15112, Doha, Qatar

E-mail: alandalus@alandalusintl.com | www.alandalusintl.com